

**Armlock® 261 & 262
Direct-Pull Magnets**

The Adams Rite Door magnet range are direct pull magnets that are used as part of an access control system for electric locking applications.

Key Benefits:

- Suitable for use on aluminium, timber and steel doors
- Compact case size & clean aesthetics
- Maintains a magnetic holding force of at least 250kg (550lbs)
- Strong durability & low maintenance
- Fit any aluminium, timber or steel door
- CE marked
- Has a security pin feature to help prevent unauthorised brackets removal of the magnet from the door frame fixing plate
- Available for outward and inward opening door applications
- User selectable dual voltage -12 or 24vDC
- Also available as a double magnet model
- Surface or mortice version
- Monitoring available (Hall Effect)
- Built in voltage spike suppressor

Related Hardware:

'L' and 'Z' Brackets, Armature Housing, 4591M & 999M Monitored, Paddle Handle & Exit Device, Switching Accessories, RiteKey Keypad, Push-to-Exit Button, Power Supply Unit

Note: For out of hours security specify the Sentinel 6 Deadlock in conjunction with the direct-pull magnet.

SPECIFICATIONS:

Single Magnet: Single Magnet: 25mm x 250mm x 42mm (261 models).
28mm x 230mm x 38mm (262 model).

Double Magnet: 25mm x 500mm x 42mm (261 models only).

Armature: 11.3mm x 160mm x 36mm (2 no. for double magnet).

Nominal Holding Force: 250kg (550lbs).

Supply Voltage: 12 or 24vDC (±15%). Dual coil.

Nominal Current: 480mA @ 12vDC, 240mA @ 24vDC.
Built-in voltage spike suppressor.

Monitoring: Relay dry contact with LED. Integral on 261 models, compact isolated unit on 262-005.

Door Gap: Maximum 3mm (1/8").

261 Positioning: Outward opening - surface mounted to door frame header.
Inward opening - door frame header using 'L' & 'Z' brackets.

262 Positioning: Mortice mounted for single action swinging or sliding door applications (not to be used as a shearlock).

Magnet Housing: Brushed satin aluminium.

Note: To achieve immediate release, it is important that the release switch breaks the circuit on the positive supply to the magnet.


ORDERING CODES:

Surface mounted direct-pull magnet, 12/24vDC, suitable for timber or metal door applications.


261-000	Single, non-monitored
261-200	Double, non-monitored
261-005	Single, monitored
261-205	Double, monitored
262-005	Mortice mounted single direct-pull magnet, 12/24vDC, monitored, complete with armature fixings for timber and metal doors.



261

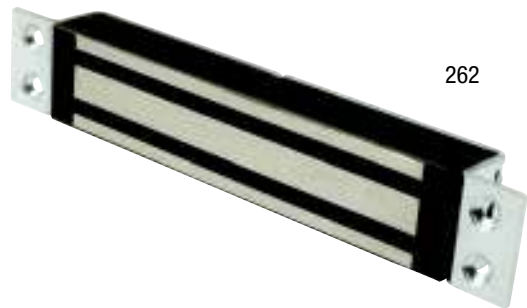

262

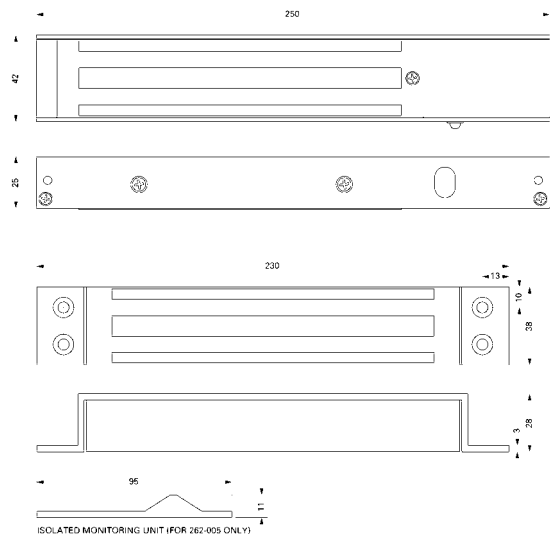

268-600

Armlock® 260/280 Series glass armature bracket

**Parts:
261-300
261-015**

Spare armature plate only for 260 series. Surface mounted magnets & armature fixings only for 260 series.